




Hakuu

Premium Japanese Sugi cladding is crafted from carefully selected straight logs, meticulously graded for colour and grain uniformity, and precision-sanded for a superior finish. This versatile product excels in exterior applications and can be installed with or without coating.

Colours



Natural Sugi tones.
Available in original or coated finish.


Uses

Exterior timber cladding.

Profiles and Dimensions

(diagrams real size, mm)

- **Tongue and groove (T&G):** 135 mm face width, 122 mm cover, 4.0 m set lengths (actual 3,930 mm)
- **Shiplap:** 140 mm face width, 130 mm cover, 4.0 m set lengths (actual 3,930 mm)

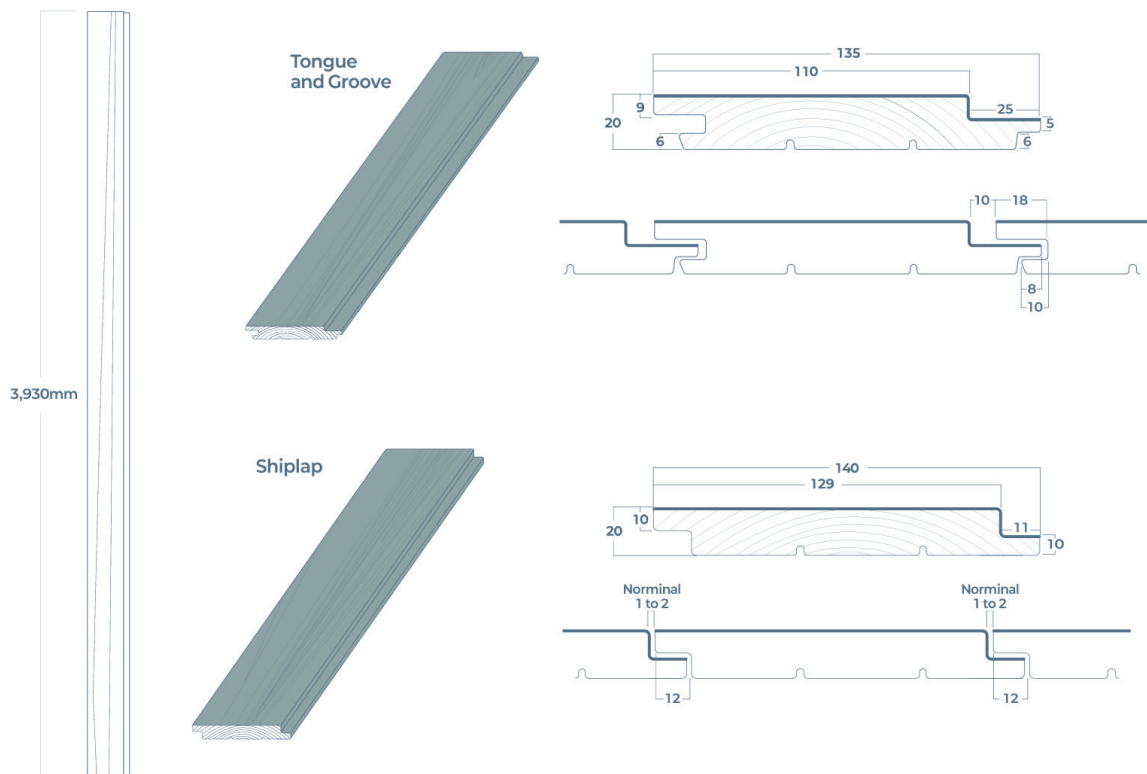

- See the Studio Tsukuru Installation Guide for profile drawings and detailed dimensions.

· Prefinish

Our Sugi cladding offers versatile finishing options. For exterior installations where a natural aesthetic is desired, the wood can be left untreated. Custom coating options are available depending on project requirements. When used externally without additional finishing, the wood develops a natural patina over time, enhancing its authentic character. This approach also allows for future colour refinement or surface maintenance using our Touch-up Cream, if consistency or enhancement is required.

Prefinish Color

Natural/Coated

Finishes

Brushed or bandsawn face, in both uncharred and charred finishes

· Installation

Coverage

- Recommend adding 15-25% additional material to the calculated area
- Important for avoiding costly supplemental shipping

Fastening (recommendation only)

Studio Tsukuru does not supply fasteners. The installer is responsible for sourcing appropriate fasteners.

- **Exterior:** use ring-shank or screw-shank head fasteners; install on rigid battens

Layout Options

- Suitable for vertical or horizontal installation
 - Compatible with all profiles
-

· Species

Cryptomeria japonica,
a monotypic genus in the cypress family native to Japan.

· Bushfire compliance

Studio Tsukuru yakisugi is suitable for BAL-LOW, BAL-12.5, and BAL-19 applications, subject to project-specific compliance under AS 3959:2018. See the Studio Tsukuru BAL Compliance Position paper for the detailed compliance routes, including the 400 mm band rule and the AS 1530.8.1 tested-assembly alternative. BAL-29 and above are not supported.

· Warranty

Backed by the Studio Tsukuru 10-year manufacturer's limited warranty. See the separate Studio Tsukuru Warranty document for full terms and conditions.